



Redwood PVC
The Strip Curtain Specialists



Twin-Track Curtains

The curtain system that gives you compete flexibility.

The infinitely adaptable curtain system.

The clever rail design allows for any amount of strip overlap - so you can create very bespoke curtains. Strips are simply slid into any position along the front and back parallel grooves.

It's also ideal if you need to fit a curtain accurately within a defined / maximum width opening or room.

Rails are fixed in position with supplied universal 'L' shaped brackets. (*Fixings not supplied.*) These can be surface or soffit mounted.


Rails come in standard lengths that can easily be ganged-up and /or cut to fit any width of opening.

PVC strips come cut to length with hanging holes pre-drilled to match the supplied clamp plates. (*Plates come with mounting nuts / bolts. supplied*)

Takes 200mm 300mm & 400mm strips in a range of spec options to suit all uses.

Instant Benefits:

- Cuts energy bills by preserving heat and/or cold
- Protects employees and/or goods from weather, dust, noise and flying pests
- Can be used as door curtain, canopy wall or partition
- Replacement strips are available as cost-effective way to prolong curtain life

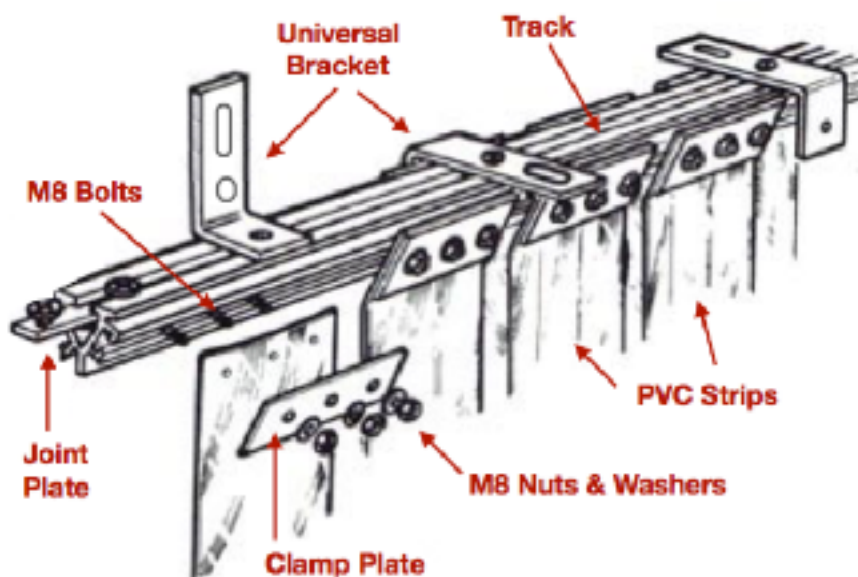

Sliding options available - contact us for more details.

For more information or to order:

Call: 01275 810289

Email: sales@redwoodstripcurtains.co.uk

DOORSTRIP TWIN TRACK SYSTEM

Installation

Important


Prior to installation, unroll all the PVC strips and place them on a clean, flat surface in a warm atmosphere for a minimum of twenty-four (24) hours. This will allow them to return to their original form.

Hanging the rails

Rails supplied in stock lengths to cut down / gang up as needed. Brackets come with fixings for fitting to rail only.

1. Slot the head of an M8 bolt into the rail's top groove. Slide to position and fit bracket. Secure in place with an M8 nut.

Locate brackets near both ends of rail and at approx 1000mm intervals.

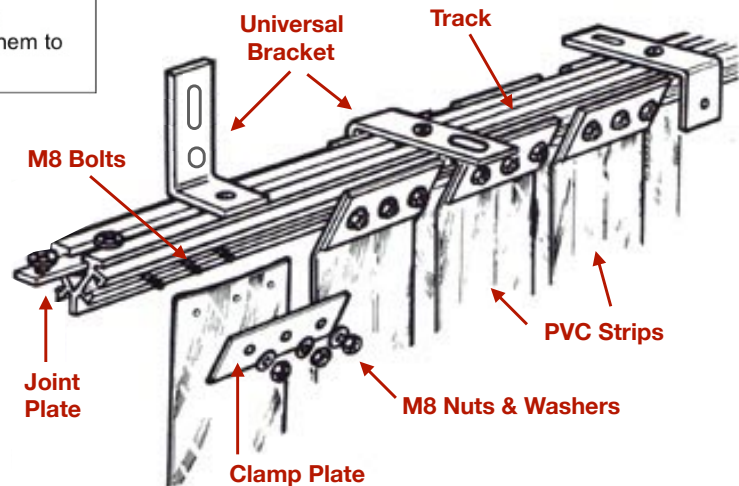

2. Address rail to mounting surface, making sure it's level and fit using suitable fixings. (Not supplied.)
NOTE: If fitting between walls, you'll need pre-fit the bolts for mounting the strips. See point 4 below.

TIP: Make sure you can reach the rails's rear when fitted. It'll make fitting the back strips easier.

3. If your order has multiple rails, connect them with the supplied joint plates.

Mounting the PVC strips

4. Side half the remaining M8 bolts into the rail's front groove and half into its rear groove.

5. Starting at one end, fit the first strip onto the bolts in the front groove. Fit with the concave side of the PVC facing into the rail. Locate a clamp plate over the top and secure with M8 nuts.

6. Repeat with a strip for the back groove. As before, ensure its concave side faces into the rail so the front and back strips 'interlock' as shown. **Remember to overlap the strips by your chosen amount.**

Concave Sides Interlinking



7. Continue alternating between front and back groove until all strips are fitted. Adjustments to placement or overlap can be done by loosening the clamp plates and sliding individual strips left or right as required.

8. With a sharp knife, trim all strips to a final length 10-20mm above floor level so they hang freely.

DOORSTRIP

MEASURING FOR A QUOTE IS EASY...

So we can size and spec your curtain correctly, we need to know the height (we call this the 'drop') and width of the door opening. Plus... its location and the type of traffic that may need to pass through it (e.g. people, pallet trucks, forklifts, etc). If you can provide a photo or two, even better.

Location & fitting: Unless told otherwise, we assume curtain rails will be face fitted, internally to an existing structural surface (i.e. a beam or lintel) which spans the opening. Ideally, curtains should be slightly wider than the opening to make them as effective as possible. If obstacles at the sides prevent this, please tell us so we can size the curtain to the available space. If you need a beam to hang your curtain from, we can supply this.

Standard pedestrian door

Drop (D) From the underside of the frame at the top, to the floor. **Width (W)** Between the inside edges.


Roller shutter door

Drop (D)

With the door fully rolled up, measure from just below the door spool, to the floor.

Width (W)

Measure between the outer edges of the vertical door runners.

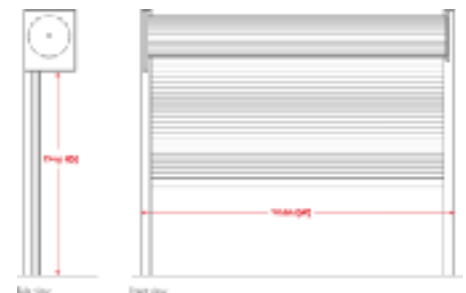


Sectional overhead door

Drop (D)

Measure from just beneath where the curve of the door runner begins, to the floor.

Width (W)

Measure between the outer edges of the vertical door runners.

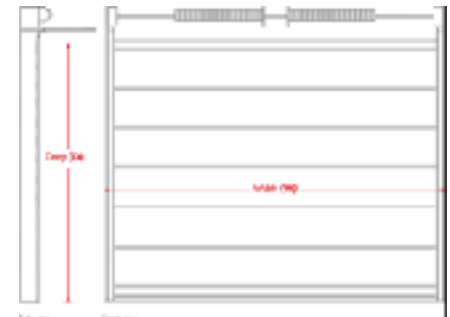

Folding shutter doors


Drop (D)

From the top of the door runner, to the floor.

Width (W)

Between the outer edges of both doors.

If you never open the doors fully, just measure the section which you do open **Opening (O)**

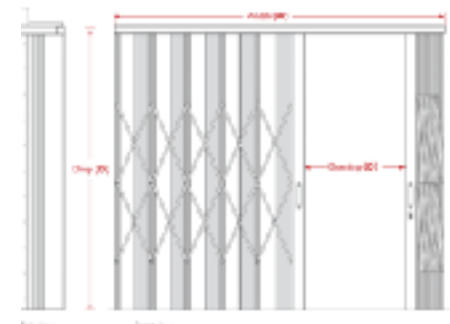

We always recommend curtains are fitted internally so the strips can be protected from the worst of weather. Fitting outside can accelerate the speed at which the PVC becomes damaged or loses clarity.


Also available from Redwood



Chiller cabinet curtains

For upright multi-deck units or deli-counters.

Can cut energy / running costs by up to 60%.

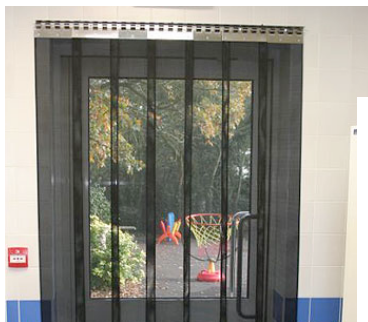

Insect curtains

In black suntex mesh or perforated clear PVC.

No better way to keep out flying insects and pests.



Anti-UV curtains

Health & safety protection in a range of colours.


Basic & EN1598 grade available.



Child-safe curtains

Ideal for schools and public buildings.

Extra safe if strips are detached by mis-use.

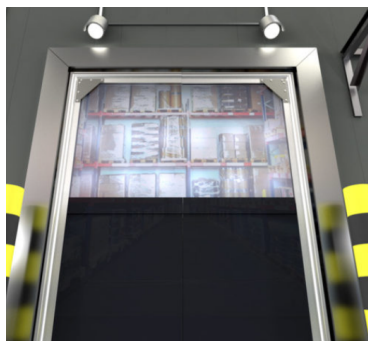

Crash doors

For openings where strip curtains aren't practical.

Available in range of styles to suit range of locations.



Replacement strips

For all types of hanging rail systems.

Quick, affordable way to prolong a curtain's life.



BrushStrip excluders

Keep out draughts and crawling insects.

With 3 angled heads so it can be fitted anywhere.



Steel beams & brackets

For supporting curtains where no existing structural support is available.

Delivered direct to site.



Animal curtains

Made to withstand the toughest of customers.

Up to 10mm thick.

REDWOOD STRIP CURTAINS LTD

Unit 21, Southfield Road Trading Estate, Nailsea, Bristol. BS48 1JE

Tel: 01275 810289 Email: sales@redwoodstripcurtains.co.uk